PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶: G11B 7/00, 7/24

A1

(11) International Publication Number:

WO 98/53448

7700, 7724

(43) International Publication Date: 26 November 1998 (26.11.98)

(21) International Application Number:

PCT/RO98/00006

(22) International Filing Date:

20 May 1998 (20.05.98)

(30) Priority Data:

97-00928

21 May 1997 (21.05.97)

RO

(71)(72) Applicant and Inventor: PAVEL, Eugen [RO/RO]; Calea Mosilor 274, ap. 34, R-73252 Bucuresti 2 (RO).

(74) Agent: ROMINVENT S.A.; Str. Ermil Pangratti 35-1, R-71128 Bucuresti I (RO).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published


With international search report.

Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: THREE-DIMENSIONAL OPTICAL MEMORY WITH FLUORESCENT PHOTOSENSITIVE MATERIAL

(57) Abstract

The invention relates to a WORM type (write-once-read-many) three-dimensional optical memory made by fluorescent photosensitive materials. The optical memory is based on one-photon and two-photon processes for writing and reading the digital information. Since for reading the fluorescence is used a high reading sensibility is obtained. The invention has the advantage of a novel device for storage and retrieval of the information having application in computers.

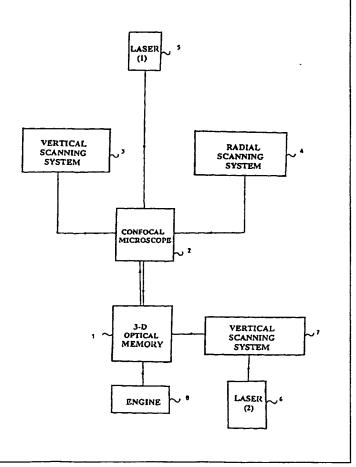

THREE-DIMENSIONAL OPTICAL MEMORY WITH FLUORESCENT PHOTOSENSITIVE MATERIAL

5

Technical field

The present invention relates to a three-dimensional optical memory with fluorescent photosensitive materials and more particularly to a method and device for storage and retrieval digital data, using fluorescence phenomenon. The device presented in the invention is a WORM type storage system (write-once-read-many).

15

25

35

40

Background of the invention

It is known that the growing of computer applications has imposed the necessity for memories with huge storage capacity needed for libraries, government agencies, hospitals, etc. The new memories should have the following characteristics: low-cost, small size and low energy consumption.

Present memory technologies, such as semiconductor memories, CD-ROMs, rigid and flexible magnetic disks, and magnetic tape store information on a two-dimensional support. Due to their 2-D nature, these memories are not able to provide parallel access, and their access time grows with increasing capacity.

A solution is the use of the third dimension. Three-dimensional optical memories have higher theoretical storage capacity than present 2-D memories.

For example, the maximum theoretical storage density for an optical disk is $1/\lambda^2 = 3.5 \times 10^8 \text{bits/cm}^2$, while for a 3-D memory $1/\lambda^3 = 6.5 \times 10^{12} \text{bits/cm}^3$ assuming that the same wavelength of light $\lambda = 500 \text{ nm}$ is used to access the information. In addition, 3-D optical memory have the potential for parallel access, because an entire plane can be read or written in a single operation. 3-D data storage was experimented on holographic memories made by photorefractive materials (D. Psaltis and F. Mok, Scientific American, November 1995, p.52).

BNSDOCID: <WO___9853448A1_I_>

Summary of the invention

5

10

15

20

25

30

35

40

It is the object of the present invention to employ the fluorescence phenomenon to provide a WORM type 3-D optical memory. Since the read cycle uses fluorescence rather than changes in absorption a higher sensibility is obtained.

The invention is based on writing and reading the information in fluorescent photosensitive materials namely fluorescent photosensitive glass (Romanian Patent Application No. 97-00005, January 6, 1997) and a fluorescent photosensitive vitroceramic (Romanian Patent Applications No. 97-00233, February 4, 1997 and No. 97-00761, April 21, 1997) created by the author of present invention. Writing and reading of said data are carried out with a confocal microscope. The confocal principle was invented by Marvin Minsky. A point light source is imaged in the object plane. The emitted fluorescent light is directed to a photomultiplier through a detector pinhole. The pinhole is a spatial filter, which permits the analysing of the light issued only from the focal plane containing this object. This fact ensures obtaining an improved spatial resolution. A computer displays the point as a pixel on a screen. In order to produce a complete image, the light point is moved over the entire object. The arrangement of the detector pinhole, conjugated to the illumination pinhole, ensures that only information from the focal plane reaches the detector. The confocal principle is especially valuable in fluorescence microscopy, since it almost completely eliminates stray light not coming from focal plane.

Thus the system is able to produce fluorescence images with optimum clarity and resolution of fine details. Confocal system LEICA TCS NT achieves an x-/y-resolution of 0.18μ (FWHM) and a corresponding z-resolution of better than 0.35μ (FWHM) at $\lambda = 488$ nm and N.A.=1.32.

The analyzed volume of the sample is under $1 \mu m^3$. An improvement of the fluorescence microscopy has been obtained with two-photon process which is used for the excitation of fluorescent photosensitive material. The two-photon microscopy is a non-linear technique that provides intrinsic three-dimensional resolution with negligible out-of-focus photoexcitation. A similar result is obtained if the excitation beam is perpendicular to the fluorescence beam. The writing process consists of the irradiation of fluorescent photosensitive material with a radiation producing a fluorescence extinction in the irradiated areas. The reading is obtained by the excitation of material. Non-irradiated areas have a strong fluorescence.

Invention presents the advantage of a novel device for storage and retrieval data having application in computers.

Disclosure of the invention

5

The invention is further illustrated by four examples which disclose the characteristic features of the invention.

The objects, features and advantages of the invention will become clear from the following description set forth below, in conjunction with the drawings, in which:

FIG. 1 is a block diagram for the writing/reading device.

FIG. 2 is a diagrammatic view of the confocal microscope. 1() Referring to FIG. I an optical system for recording and reading data on optical memory 1 is shown. The experimental system includes: a confocal microscope 2, vertical scanning systems 3, 7, a radial scanning system 4, a laser (1) 5, laser (2) 6 and an engine 8 used for rotation of the optical memory 1. The writing process consists in the irradiation of a selected 15 volume of memory 1 with a light beam of the laser (1). The volume selection is carried out with said confocal microscope 2, vertical scanning system 3 and radial scanning system 4. The irradiated volume of fluorescent photosensitive material suffers a transition (at electronic level 20 for fluorescent photosensitive glass and at structural level for fluorescent photosensitive vitroceramic) which produces the fluorescence extinction. Two procedures could be used for reading. One of these procedures produces the excitation with one-photon process. Laser (2) and vertical scanning system 7 are used in the optical system. The second procedure,

which is based on said two-photon process, directs the beam of laser (1) to the specimen.

The confocal microscope (FIG.2) used in writing processes has the following elements: two pinholes 9, 10, the lens 11, 12, 13, 15, the beam-splitter 14, the laser 5 and the detector 16.

The present invention will be illustrated in greater details by the following examples, but the merits thereof are not intended to be limited by the materials, compositions and procedures described in these examples.

Example 1: A Ce, Eu doped fluorescent photosensitive glass is used as a support for the optical memory namely: $Na_2O-P_2O_5-0.005$ $CeO_2-0.005$ Eu_2O_3 .

Memory writing is carried out with said laser (1) (XeCl laser) at λ_1 =308 nm and the memory reading is based on said laser (2) Nd:YAG laser with λ_2 =532 nm.

4()

Example 2: A fluorescent photosensitive glass is the support of optical memory as a variant of Example 1: $2Na_{1}O_{1}-(Y_{0.04}Eu_{0.05}Pr_{0.01})_{1}O_{1}-5P_{1}O_{2}$. The writing process uses a two-photon absorption of laser light. The recording is carried out by a tunable Ti:sapphire laser (1) at $\lambda_{1} = 720$ nm with 100fs laser pulses. A Nd:YAG laser (2) at $\lambda_{2} = 532$ nm excites the fluorescent material for said reading process.

Example 3: A Tb doped fluorescent photosensitive vitroceramic is used for the optical memory (wt%), namely:

- ~30SiO₃-45PbF₃-14Al₂O₃-10YF₃-1TbF₃-0.05Sb₂O₃-0.01Ag The recording and reading are based on the two-photon processes. A tunable Ti:sapphire laser (1) with 100fs laser pulses writes at $\lambda_1 = 720$ nm and reads at $\lambda_2 = 750$ nm.
- Example 4: A similar fluorescent photosensitive vitroceramic as in Example 3 is used for the optical memory (wt%), namely:

 ~69SiO₂-15.3Na₂O-5ZnO-7Al₂O₃-0.25Tb₄O₃-0.25CeO₂-0.2Sb₂O₃-0.01Ag-2.3F-0.7Br. The writing is carried out with a tunable Ti: sapphire laser (1) with 100fs laser pulses using λ₁= 720 nm while for reading is used λ₂ = 980 nm.

25

5

30

35

40

5 CLAIMS

- 10 1. A data storage and retrieval system characterized in that the fluorescent photosensitive materials (fluorescent photosensitive glass and fluorescent photosensitive vitroceramic) are used as a support for optical memory.
- 15 2. A data storage and retrieval system as in claim 1 characterized in that it comprises:
 - i) a laser (1) 5 for writing;
 - ii) a confocal microscope 2;
 - iii) a vertical scanning system 3 and a radial scanning system 4 used for the movement of writing and excitation beams;
 - iv) a rotating optical memory 1;
 - v) an excitation laser (2) 6 provided with a vertical scanning system 7 for reading the optical memory by one-photon process.

25

20

- 3. A data storage and retrieval system according to claims 1 and 2 characterized in that the laser (1) is a pulse laser with 100fs laser pulses and uses for writing and reading the two-photon process.
- 4. A data storage and retrieval system according to claims 1 and 2 characterized in that the excitation beam is perpendicular on fluorescence beam in the case of one-photon process.
- 5. A data storage and retrieval system according to claims 1, 2, 3 and 4 characterized in that the two lasers are tunable in order to operate at a variable frequency.

40

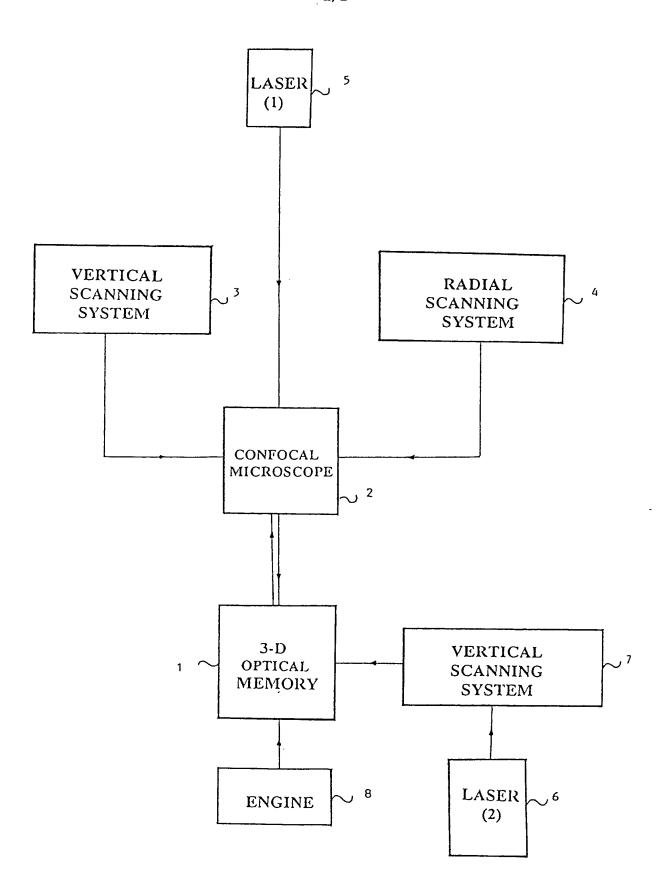


FIG. 1.

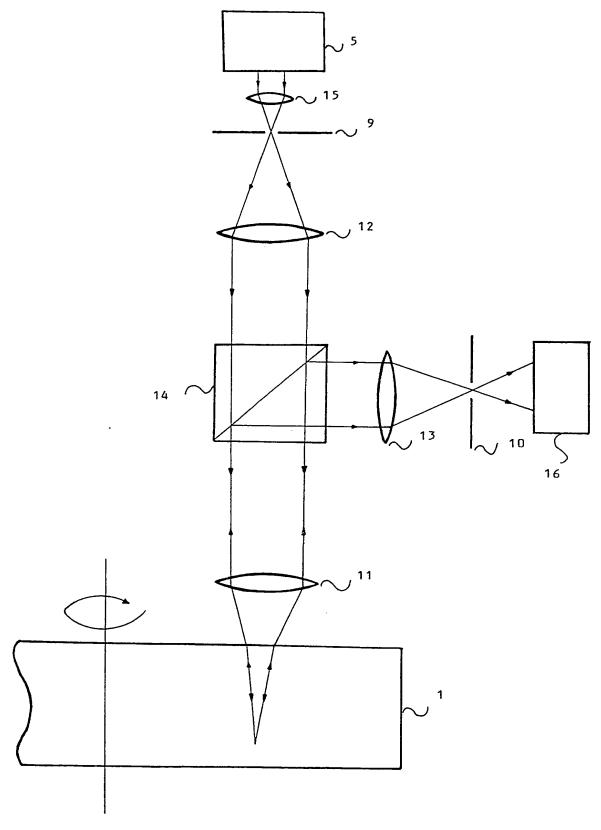


FIG. 2.

INTERNATIONAL SEARCH REPORT

PCT/RO 98/00006

A. CLAS	SIFICATION OF SUBJECT MATTER				
IPC 6	G11B7/00 G11B7/24				
According	to International Patent Classification(IPC) or to both national classi	fication and IDC			
	S SEARCHED	incation and IPC			
Minimum	documentation searched (classification system followed by classification	ation symbols)			
IPC 6	G11B	,			
Document	ation searched other than minimumdocumentation to the extent tha	t such documents are included in the fields se	arched		
1		•			
Electronic	data base consulted during the international search (name of data	base and, where practical, search terms used)		
			•		
ļ					
C. DOCUM	ENTS CONSIDERED TO BE RELEVANT				
Category °	Citation of document, with indication, where appropriate, of the re	elevant passages	Relevant to claim No.		
X	WO 91 07651 A (CORNELL RES FOUND	DATION INC)	1-5		
	30 May 1991		1 3		
	see page 5, line 28 - page 6, line 19				
	see page 16, line 1 - page 17, line 7; claims 7,18				
Ε	WO 98 25262 A (GLUSHKO BORIS ALE	XY :OMD	1,2,4		
	OPITCAL MEMORY DEVICES LTD (IL):	LEVICH E)	1,2,4		
	11 June 1998	·			
i	see the whole document				
Α	US 5 325 324 A (RENTZEPIS PETER	M ET ALL	1.5		
	28 June 1994	in LI AL)	1-5		
	see the whole document				
		·	•		
Furth	ner documents are listed in the continuation of box C.	[V]			
		Patent family members are listed in	annex.		
	tegories of cited documents :	"T" later document published after the intern	national filing date		
"A" docume conside	nt defining the general state of the art which is not ered to be of particular relevance	or priority date and not in conflict with t cited to understand the principle or the	he application but		
"E" earlier d	ocument but published on or after the international	invention	1		
filing da "L" documen	nt which may throw doubts on priority claim(e) or	"X" document of particular relevance; the clicannot be considered novel or cannot linvolve an inventive stop when the	ne considered to		
citation	s cited to establish the publication date of another of other special reason (as specified)	involve an inventive step when the doc "Y" document of particular relevance; the cla	simed invention		
	nt referring to an oral disclosure, use, exhibition or	document is combined with one or mor	entive step when the		
"P" documer	nt published prior to the international filling date but	ments, such combination being obvious in the art.	s to a person skilled		
later the	an the phorny date claimed	"&" document member of the same patent fa	amily		
Cate of the a	ctual completion of theinternational search	Date of mailing of the international search	ch report		
14	September 1998	21/09/1998			
		21/03/1338			
and and M	ailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2	Authorized officer			
	NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,				
	Fax: (+31-70) 340-3016	Benfield, A			
- COTCO		<u></u>			

INTERNATIONAL SEARCH REPORT

...formation on patent family members

Inter: nal Application No PCT/RO 98/00006

Patent document cited in search repo		Publication date	Patent family member(s)	Publication date
WO 9107651	A	30-05-1991	US 5034613 A EP 0500717 A EP 0807814 A JP 5503149 T	23-07-1991 02-09-1992 19-11-1997 27-05-1993
WO 9825262	Α	11-06-1998	NONE	
US 5325324	Α	28-06-1994	US 5268862 A	07-12-1993

Form PCT/ISA/210 (patent family annex) (July 1992)